

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**EUROPEAN PATENT APPLICATION**

Application number: 88301791.5

Int. Cl.<sup>4</sup>: **C08F 210/00**, **C08F 232/00**,  
**/(C08F210/00,232:00),**  
**(C08F232/00,210:00)**

Date of filing: 01.03.88

Priority: 02.03.87 JP 45152/87  
 11.12.87 JP 312112/87  
 15.12.87 JP 315206/87  
 01.02.88 JP 19622/88

Date of publication of application:  
 21.09.88 Bulletin 88/38

Designated Contracting States:  
 DE FR GB IT NL

Applicant: MITSUI PETROCHEMICAL  
 INDUSTRIES, LTD.  
 2-5, Kasumigaseki 3-chome Chiyoda-ku  
 Tokyo 100(JP)

Inventor: Ishimaru, Naoshi  
 4-9, Waki 2-chome Waki-cho  
 Kuga-gun Yamaguchi-ken(JP)  
 Inventor: Tsutsui, Toshiyuki  
 3-6, Misono 1-chome  
 Ohtake-shi Hiroshima-ken(JP)  
 Inventor: Toyota, Akimori  
 103-21, Minami-Iwakuni-cho 2-chome  
 Iwakuni-shi Yamaguchi-ken(JP)  
 Inventor: Kashiwa, Norio  
 18-22, Yamate-cho 1-chome  
 Iwakuni-shi Yamaguchi-ken(JP)

Representative: Myerscough, Phillip Boyd et al  
 J.A.Kemp & Co. 14, South Square Gray's Inn  
 London, WC1R 5EU(GB)

**Cyclo-olefinic random copolymer, olefinic random copolymer, and process for producing cyclo-olefinic random copolymers.**

A cyclo-olefinic random copolymer composed of an alpha-olefin component having 3 to 20 carbon atoms and a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclo-olefin component, and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g; and an olefinic random copolymer composed of (A) an olefin component having 3 to 20 carbon atoms and (B) a cyclic polyene component and as required, (C) a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component (A) having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclic polyene component (B) and 0 to 90 mole% of recurring units derived from said cyclo-olefin component (C), and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g; and a process for production thereof. Also provided is a process for producing a cyclo-olefinic random copolymer, which comprises copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst formed from

(A) a compound of a transition metal of Group IVB of the periodic table having as a ligand a multidentate coordination compound in which at least two conjugated cycloalkadienyl groups or substituted products thereof are bonded via a lower alkylene group, and

(B) an aluminoxane.

CYCLO-OLEFINIC RANDOM COPOLYMER, OLEFINIC RANDOM COPOLYMER, AND PROCESS FOR PRODUCING CYCLO-OLEFINIC RANDOM COPOLYMERS

BACKGROUND OF THE INVENTION

1. Field of the Invention

5

This invention relates to a novel cyclo-olefinic random copolymer. More specifically, the invention has for its object the provision of a cyclo-olefinic random copolymer having excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution.

10

This invention also relates to a novel olefinic random copolymer. More specifically, the invention has for its object the provision of an olefinic random copolymer containing a carbon-carbon unsaturated bond in its side chain which has excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution.

15

This invention further relates to a process for producing a cyclo-olefinic random copolymer by copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a highly active polymerization catalyst. More specifically, the invention relates to a process for producing a cyclo-olefinic random copolymer which comprises copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst comprising a specific transition metal compound and an aluminoxane.

20

2. Description of the Prior Art

Known processes for producing cyclo-olefinic copolymers by copolymerizing alpha-olefins such as ethylene and cyclo-olefins involve the use of titanium-containing catalysts comprising titanium compounds and organoaluminum compounds or vanadium-containing catalysts comprising vanadium compounds and organoaluminum compounds.

In a copolymerization process using a titanium-containing catalyst, a cyclo-olefin has lower reactivity than an alpha-olefin such as ethylene and the copolymerization efficiency is low. In order, therefore, to expect production of a copolymer of the cyclo-olefin with the alpha-olefin, it is necessary to add the cyclo-olefin in a large quantity to the polymerization system. The presence of a large quantity of the cyclo-olefin reduces the activity of the catalyst and may result in a decrease in the molecular weight of the resulting copolymer. It is difficult therefore to obtain a high-molecular-weight copolymer. Moreover, this process has the defect that side-reactions such as the ring-opening polymerization of the cyclo-olefin tend to occur, and the resulting polymer has a broad molecular weight distribution. On the other hand, in a copolymerization process using a vanadium-containing catalyst, the copolymerization efficiency of the cyclo-olefin is higher than in the case of using the titanium-containing catalyst and the resulting copolymer has a narrow molecular weight distribution. But it has the defect that the polymerization activity is generally very low.

Catalysts comprising transition metal compounds and aluminoxanes are proposed as highly active polymerization catalysts for olefins in, for example, Japanese Laid-Open Patent Publications Nos. 19309/1983, 95292/1984, 35005/1985, 35006/1985, 35007/1985 and 35008/1985. Of these, Japanese Laid-Open Patent Publications Nos. 19309/1983, 35005/1985, 35006/1985, 35007/1985 and 35008/1985 describe that these catalyst systems can be applied to the copolymerization of ethylene with other alpha-olefins. With regard to the production of cyclo-olefinic copolymers, Japanese Laid-Open Patent Publication No. 221206/1988 discloses a catalyst comprising a transition metal compound and an aluminoxane with regard to the production of a copolymer of an alpha-olefin and a cyclo-olefin. This catalyst, however, has low polymerization activity, and is difficult of giving the copolymer in good yields.

It is generally known that by using Ziegler-type catalysts comprising a combination of titanium or vanadium compounds and organoaluminum compounds, binary copolymers of ethylene with cyclo-olefins or ternary copolymers of ethylene, alpha-olefins such as propylene or 1-butene and cyclo-olefins are obtained. However, no example has been known in which an alpha-olefin having 3 to 20 carbon atoms was copolymerized with a cyclo-olefin in the absence of ethylene with a Ziegler-type catalyst. Naturally, no such copolymer has been reported so far.

Polycarbonate, poly(methyl methacrylate) and polyethylene terephthalate have been known as synthetic

resins having excellent transparency. For example, polycarbonate is a resin having excellent thermal stability, heat aging resistance and impact strength in addition to excellent transparency, but have the disadvantage of being inferior in chemical resistance and susceptible to attack by strong alkalis. Poly-(methyl methacrylate) is susceptible to attack by ethyl acetate, acetone and toluene, is swollen in ether and has low thermal stability. Polyethylene terephthalate has excellent thermal stability and mechanical properties, but is susceptible to attack by strong acids or alkalis and liable to undergo hydrolysis.

Many polyolefins widely used as general-purpose resins have excellent chemical resistance, solvent resistance and mechanical properties, but poor thermal stability. Moreover, they have poor transparency because of their crystalline nature. Generally, the transparency of polyolefins is improved by adding a nucleating agent and thereby finely dividing their crystalline structure, or by quenching them to stop growth of crystals. The effects of such techniques, however, have not proved to be entirely satisfactory. Rather, the addition of a third component such as a nucleating agent is likely to reduce the inherent excellent properties of the polyolefins. The quenching method requires a large-sized apparatus, and with a reduction in crystallinity, the polyolefins are likely to be degraded in thermal stability and rigidity.

With regard to the copolymerization of ethylene with bulky comonomers, U. S. Patent No. 2,883,372, for example, discloses a copolymer of ethylene and 2,3-dihydrodicyclopentadiene. This copolymer has an excellent balance between rigidity and transparency, but poor thermal stability because its glass transition temperature is about 100 °C. A copolymer of ethylene and 5-ethylidene-2-norbornene has similar defects.

Japanese Patent Publication No. 14910/1971 proposes a homopolymer of 1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydro-naphthalene. This polymer, however, has poor thermal stability and heat aging resistance.

Japanese Laid-Open Patent Publication No. 127728/1983 proposes a homopolymer of 1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene or a copolymer of the above cyclo-olefin and a norbornene-type comonomer. It is clear from this patent document that these copolymers are ring-opened polymers. These ring-opened polymers have poor thermal stability and heat aging resistance because they contain an unsaturated bond in the main polymer chain.

Japanese Laid-Open Patent Publications Nos. 168708/1985, 98780/1986, 115912/1986, 115916/1986, 120816/1986, 95906/1986 and 95905/1986 disclose that olefinic random copolymers of ethylene and specific bulky cyclo-olefins have a good balance in thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties while having transparency, and exhibit excellent performance in the field of optical materials such as optical memory discs and optical fibers. These copolymers contain ethylene copolymerized therein, and in order to impart good thermal stability, a large amount of a cyclo-olefin must be copolymerized. Reaction of such copolymers with maleic anhydride or the like to impart polar property to these copolymers usually requires the use of peroxides. This causes cleavage of the main chain and results in a reduction in molecular weight. It is desired therefore to provide olefinic random copolymers which in spite of a low cyclo-olefin content, have excellent thermal stability and can be modified without using peroxides.

#### 40 SUMMARY OF THE INVENTION

It is an object of this invention to provide a novel cyclo-olefinic random copolymer which has excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution and which possesses excellent thermal stability even when its cyclo-olefin content is small.

Another object of this invention is to provide a novel olefinic random copolymer which has excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution, possesses excellent thermal stability even when its cyclo-olefin content is small, and which has a carbon-carbon unsaturated bond capable of reacting with maleic anhydride or the like in its side chain, and which can be modified easily according to various purposes.

Still another object of this invention is to provide a process for producing a cyclo-olefinic copolymer having a narrow molecular weight distribution with excellent polymerization activity and a high copolymerization efficiency of the cyclo-olefin.

The above objects are achieved in accordance with this invention by a cyclo-olefinic random copolymer composed of an alpha-olefin component having 3 to 20 carbon atoms and a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclo-olefin component, and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g.

The above objects are also achieved in accordance with this invention by an olefinic random copolymer composed of (A) an olefin component having 3 to 20 carbon atoms and (B) a cyclic polyene component and as required, (C) a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component (A) having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclic polyene component (B) and 0 to 90 mole% of recurring units derived from said cyclo-olefin component (C), and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g.

The above objects are also achieved in accordance with this invention by a process for producing a cyclo-olefinic random copolymer, which comprises copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst formed from

(A) a compound of a transition metal of Group IVB of the periodic table having as a ligand a multi-dentate coordination compound in which at least two conjugated cycloalkadienyl groups or substituted products thereof are bonded via a lower alkylene group, and

(B) an aluminoxane.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS


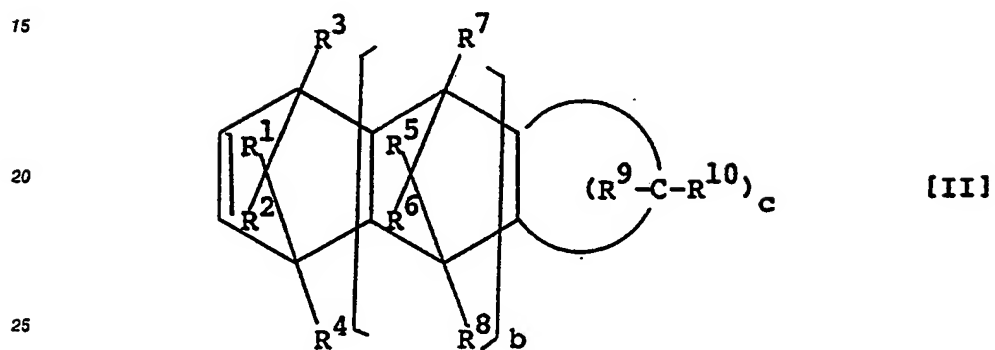
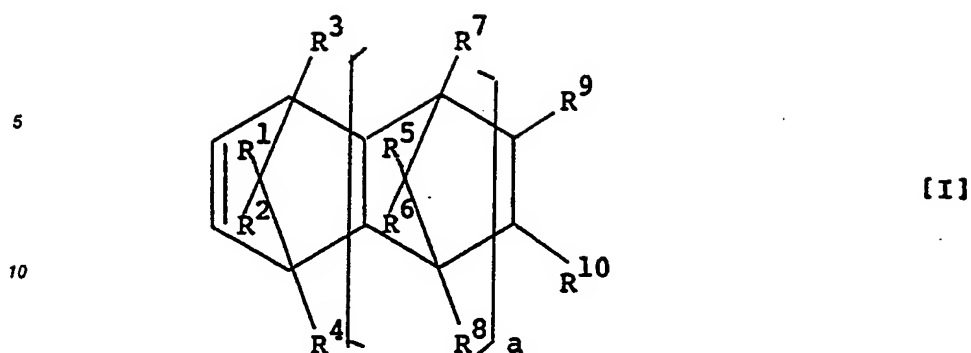
The present inventors made investigations for a novel cyclo-olefinic random copolymer which has excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution and which possesses excellent thermal stability even when its cyclo-olefin content is small. These investigations have now led to the discovery that a novel cyclo-olefinic random copolymer having the aforesaid properties can be obtained by copolymerizing an alpha-olefin having 3 to 20 carbon atoms with a cyclo-olefin in the presence of a catalyst formed from a zirconium catalyst and an aluminoxane under specific conditions.

According to this invention, there is provided a cyclo-olefinic random copolymer composed of an alpha-olefin component having 3 to 20 carbon atoms and a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclo-olefin component, and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g. The cyclo-olefinic random copolymer of this invention is a cyclo-olefinic random copolymer composed of an alpha-olefin component having 3 to 20 carbon atoms and a cyclo-olefin component.

The cyclo-olefin component is a cyclo-olefin represented by the following general formula [I], [II] or [III], and in the cyclo-olefinic random copolymer of this invention, the cyclo-olefin component forms a structure represented by the general formula [IV], [V] or [VI].






35 In the formulae, a and b are an integer of 0 or more, c and d are an integer of 3 or more, and each of R<sup>1</sup> to R<sup>10</sup> represents a hydrogen atom, a halogen atom or a hydrocarbon group.

40

45

50

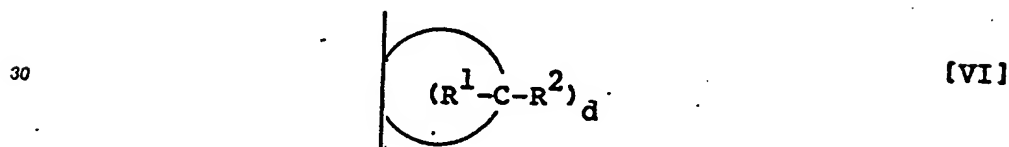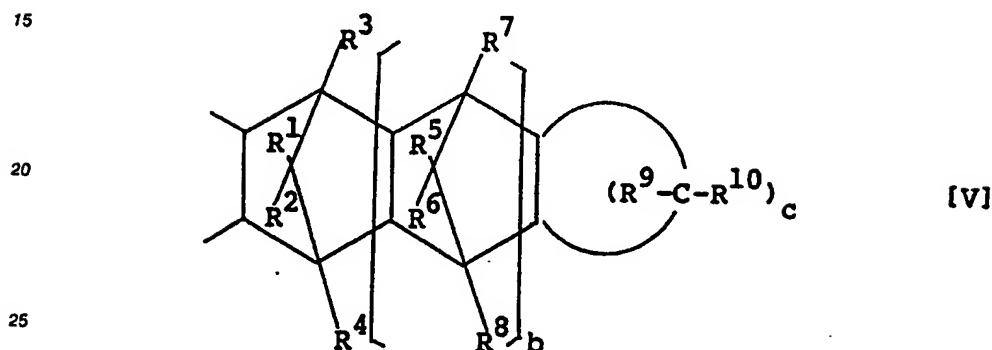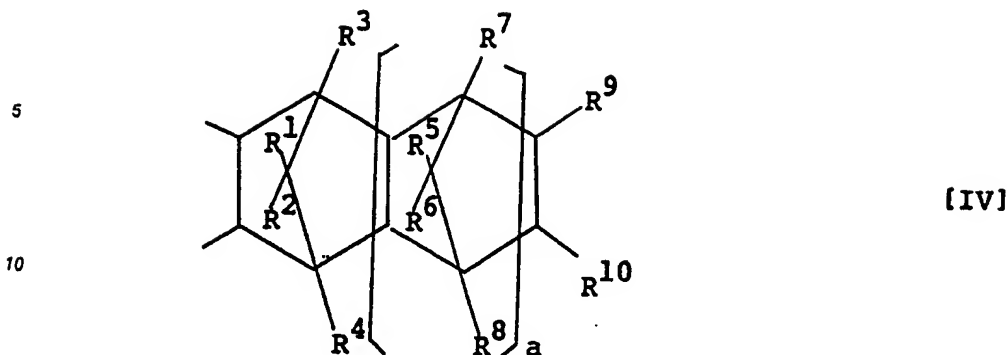55



In the formulae, a, b, c, d, and R<sup>1</sup> to R<sup>10</sup> are as defined above.

35 In the production of the cyclo-olefinic random copolymer of this invention, examples of the C<sub>3</sub>-C<sub>20</sub> alpha-olefin used as a material include propylene, 1-butene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 1-eicosene.

The cyclo-olefin used as another material in the production of the cyclo-olefinic random copolymer of this invention is at least one cyclo-olefin selected from the group of unsaturated monomers represented by 40 general formulae [I], [II] and [III].

Cyclo-olefins represented by general formula [I] may be easily produced by condensing cyclopentadienes with the corresponding olefins in accordance with the Diels-Alder reaction. Cyclo-olefins represented by general formula [II] can be easily produced likewise by condensing cyclopentadienes with the 45 corresponding cyclo-olefins in accordance with the Diels-Alder reaction.

Specific examples of the cyclo-olefins of general formula [I] include octahydronaphthalenes such as 1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-ethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-propyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 50 2-hexyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-stearyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2,3-dimethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-methyl-3-ethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-chloro-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-bromo-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 55 2,3-dichloro-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-cyclohexyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-n-butyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, and



0 283 164

2-isobutyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, and;  
the compounds described in Table 1 below.

5

10

15

20

25

30

35










40

45

50







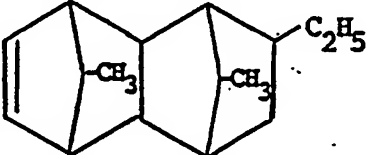
55

Table 1

Chemical formula	Chemical name
	bicyclo[2,2,1]hept-2-ene
	6-methylbicyclo[2,2,1]hept-2-ene
	5,6-dimethylbicyclo[2,2,1]hept-2-ene
	1-methylbicyclo[2,2,1]hept-2-ene
	6-ethylbicyclo[2,2,1]hept-2-ene
	6-n-butylbicyclo[2,2,1]hept-2-ene
	6-i-butylbicyclo[2,2,1]hept-2-ene
	7-methylbicyclo[2,2,1]hept-2-ene
	5,10-dimethyltetracyclo[4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3-dodecene







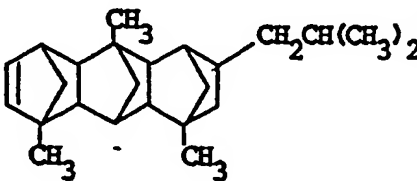
- to be continued -

Table 1 (continued)

Chemical formula	Chemical name
	2,10-dimethyltetracyclo- [4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3-dodecene
	11,12-dimethyltetracyclo- [4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3- dodecene
	2,7,9-trimethyltetracyclo- [4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3-dodecene
	9-ethyl-2,7-dimethyltetra- cyclo[4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3- dodecene
	9-isobutyl-2,7-dimethyltetra- cyclo[4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3- dodecene
	9,11,12-trimethyltetracyclo- [4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3-dodecene
	9-ethyl-11,12-dimethyltetra- cyclo[4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3- dodecene




- to be continued -

Table 1 (continued)

Chemical formula	Chemical name
	9-isobutyl-11,12-dimethyl-3-tetracyclo[4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3-dodecene
	5,8,9,10-tetramethyltetracyclo[4,4,0,1 <sup>2,5</sup> ,1 <sup>7,10</sup> ]-3-dodecene
	hexacyclo[6,6,1,1 <sup>3,6</sup> ,1 <sup>10,13</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-heptadecene
	12-methylhexacyclo[6,6,1,1 <sup>3,6</sup> ,1 <sup>10,13</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-heptadecene
	12-ethylhexacyclo[6,6,1,1 <sup>3,6</sup> ,1 <sup>10,13</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-heptadecene
	12-isobutylhexacyclo[6,6,1,1 <sup>3,6</sup> ,1 <sup>10,13</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-heptadecene
	1,6,10-trimethyl-12-isobutylhexacyclo[6,6,1,1 <sup>3,6</sup> ,1 <sup>10,13</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-heptadecene








- to be continued -

Table 1 (continued)

Chemical formula	Chemical name
	octacyclo-[8,8,1 <sup>2,9</sup> ,1 <sup>4,7</sup> , 1 <sup>11,18</sup> ,1 <sup>13,16</sup> ,0,0 <sup>3,8</sup> ,0 <sup>12,17</sup> ]- 5-dococene
	15-methyloctacyclo-[8,8,1 <sup>2,9</sup> , 1 <sup>4,7</sup> ,1 <sup>11,18</sup> ,1 <sup>13,16</sup> ,0,0 <sup>3,8</sup> , 0 <sup>12,17</sup> ]-5-dococene
	15-ethyloctacyclo-[8,8,1 <sup>2,9</sup> , 1 <sup>4,7</sup> ,1 <sup>11,18</sup> ,1 <sup>13,16</sup> ,0,0 <sup>3,8</sup> , 0 <sup>12,17</sup> ]-5-dococene

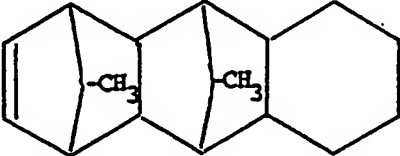



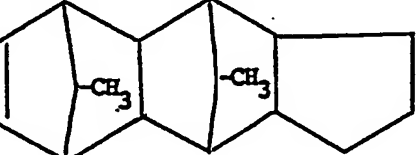


Specific examples of the cyclo-olefins of general formula [II] are compounds shown in Table 2 below.

Table 2

Chemical formula	Chemical name
	tricyclo[4,3,0,1 <sup>2,5</sup> ]-3-decene
	2-methyltricyclo[4,3,0,1 <sup>2,5</sup> ]-3-decene
	5-methyltricyclo[4,3,0,1 <sup>2,5</sup> ]-3-decene
	tricyclo[4,4,0,1 <sup>2,5</sup> ]-3-decene
	10-methyltricyclo[4,4,0,1 <sup>2,5</sup> ]-3-decene
	1,3-dimethylpentacyclo[6,6,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-hexadecene
	1,6-dimethylpentacyclo[6,6,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]-4-hexadecene


- to be continued -

Table 2 (continued)

Chemical formula	Chemical name
	15,16-dimethylpentacyclo- [6,6,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> ,0 <sup>9,14</sup> ]- 4-hexadecene
	pentacyclo[6,5,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> , 0 <sup>9,13</sup> ]-4-pentadecene
	1,3-dimethylpentacyclo- [6,5,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> ,0 <sup>9,13</sup> ]- 4-pentadecene
	1,6-dimethylpentacyclo- [6,5,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> ,0 <sup>9,13</sup> ]-4- pentadecene
	14,15-dimethylpentacyclo- [6,5,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> ,0 <sup>9,13</sup> ]-4- pentadecene
	pentacyclo[6,6,1,1 <sup>3,6</sup> ,0 <sup>2,7</sup> , 0 <sup>9,14</sup> ]-4-hexadecene
	heptacyclo[8,7,1,1 <sup>2,9</sup> ,1 <sup>4,7</sup> , 1 <sup>11,17</sup> ,0,0 <sup>3,8</sup> ,0 <sup>12,16</sup> ]-5- eicosene

- to be continued -

Table 2 (continued)

Chemical formula	Chemical name
	pentacyclo[8,8,1 <sup>2,9,14,7,11,18,0,0,3,8,0,12,17</sup> ]-5-heneicosene

Specific examples of the cyclo-olefins of general formula [III] include cyclopentene, 3-methylcyclopentene, 4-methylcyclopentene, 3,4-dimethylcyclopentene, 3,5-dimethylcyclopentene, 3-chlorocyclopentene, cyclohexene, 3-methylcyclohexene, 4-methylcyclohexene, 3,4-dimethylcyclohexene, 3-chlorocyclohexene and cycloheptene.

The cyclo-olefinic random copolymer of this invention contains 5 to 99 mole%, preferably 15 to 95 mole%, especially preferably 30 to 90 mole%, of recurring units derived from the alpha-olefin component having 3 to 20 carbon atoms, and 1 to 95 mole%, preferably 5 to 95 mole%, especially preferably 10 to 70 mole%, of recurring units derived from the cyclo-olefin component. The recurring units derived from the C<sub>3</sub>-C<sub>20</sub> alpha-olefin component and the recurring units derived from the cyclo-olefin component are arranged at random to form a substantially linear cyclo-olefinic random copolymer. That the cyclo-olefinic random copolymer of this invention is substantially linear can be ascertained by the fact that the copolymer completely dissolves in decalin at 135 °C.

The intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of the cyclo-olefinic random copolymer of this invention is 0.01 to 10 dl/g, preferably 0.05 to 7 dl/g, especially preferably 0.1 to 5 dl/g.

The molecular-weight distribution ( $\overline{M}_w/\overline{M}_n$ ) of the cyclo-olefinic random copolymer of this invention, measured by gel permeation chromatography (GPC), is usually not more than 4, preferably not more than 3.5, especially preferably not more than 3.

The cyclo-olefinic random copolymer of this invention has a glass transition temperature (T<sub>g</sub>) of 10 to 240 °C, preferably 20 to 200 °C.

The cyclo-olefinic random copolymer of this invention can be produced by polymerizing the alpha-olefin having 3 to 20 carbon atoms with a predetermined amount of the cyclo-olefin in the presence of a catalyst formed from

(A) a zirconium compound having as a ligand at least two indenyl or substituted indenyl groups or partially hydrogenated groups thereof being bonded via an alkylene group such as an ethylene group, and

(B) an aluminoxane.

The zirconium compound may have at least two indenyl or substituted indenyl groups or partially hydrogenated groups thereof, preferably two indenyl groups, two substituted indenyl groups, or two partially hydrogenated groups thereof.


Specific examples of the above zirconium compound include

ethylenebis(indenyl)zirconium dichloride,  
ethylenebis(indenyl)zirconium monochloride monohydride,  
ethylenebis(indenyl)ethoxyzirconium chloride,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)ethoxyzirconium chloride,  
ethylenebis(indenyl)dimethylzirconium,  
ethylenebis(indenyl)diethylzirconium,  
ethylenebis(indenyl)diphenylzirconium,  
ethylenebis(indenyl)dibenzylzirconium,  
ethylenebis(indenyl)methylzirconium monobromide,  
ethylenebis(indenyl)ethylzirconium monochloride,  
ethylenebis(indenyl)benzylzirconium monochloride,  
ethylenebis(indenyl)methylzirconium monochloride,  
ethylenebis(indenyl)zirconium dichloride,  
ethylenebis(indenyl)zirconium dibromide,



ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-dimethylzirconium,  
 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-ethylzirconium ethoxide,  
 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-zirconium dichloride,  
 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-zirconium dibromide,  
 5 ethylenebis(4-methyl-1-indenyl)zirconium dichloride,  
 ethylenebis(5-methyl-1-indenyl)zirconium dichloride,  
 ethylenebis(6-methyl-1-indenyl)zirconium dichloride,  
 ethylenebis(7-methyl-1-indenyl)zirconium dichloride,  
 ethylenebis(5-methoxy-1-indenyl)zirconium dichloride,  
 10 ethylenebis(2,3-dimethyl-1-indenyl)zirconium dichloride,  
 ethylenebis(4,7-dimethyl-1-indenyl)zirconium dichloride,  
 ethylenebis(4,7-dimethoxy-1-indenyl)zirconium dichloride,  
 ethylenebis(indenyl)zirconium dimethoxide,  
 ethylenebis(indenyl)zirconium diethoxide,  
 15 ethylenebis(indenyl)methoxyzirconium chloride,  
 ethylenebis(indenyl)ethoxyzirconium chloride,  
 ethylenebis(indenyl)methylzirconium ethoxide,  
 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-zirconium dimethoxide,  
 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-zirconium diethoxide,  
 20 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-methoxyzirconium chloride,  
 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-methylzirconium ethoxide,  
 methylenebis(indenyl)zirconium dichloride,  
 methylenebis(indenyl)dimethylzirconium,  
 methylenebis(4,5,6,7-tetrahydro-1-indenyl)-zirconium dichloride,  
 25 propylenebis(indenyl)zirconium dichloride,  
 propylenebis(indenyl)dimethylzirconium, and  
 propylenebis(4,5,6,7-tetrahydro-1-indenyl)-zirconium dichloride.

The aluminoxane used as component (b) of the catalyst may be, for example, an organoaluminum compound represented by the following general formula [VII] or [VIII]




wherein R represents a hydrocarbon group such as a methyl, ethyl, n-propyl, isopropyl, n-butyl or isobutyl group, preferably the methyl, ethyl or isobutyl group, especially preferably the methyl group, m is an integer of 2 or more, preferably 5 or more.

The aluminoxane may be produced, for example, by the following method (1) or (2).

The aluminoxane of general formula [VII] or [VIII] may be formed of mixed oxyaluminum units



having different hydrocarbon groups. In this case, the aluminoxane preferably has at least an oxymethyl aluminum unit



in a proportion of at least 30 mole%, preferably at least 50 mole%, especially preferably at least 70 mole%.

(1) A trialkyl aluminum or a mixture of at least two trialkyl aluminums is added to, and reacted with, a suspension of a compound containing water of adsorption or a salt containing water of crystallization, such as magnesium chloride hydrate, copper sulfate hydrate, aluminum sulfate hydrate, nickel sulfate hydrate or cerous chloride hydrate in a hydrocarbon medium.

(2) Water is caused to act directly upon a trialkyl aluminum or a mixture of at least two trialkyl aluminums in a medium such as benzene, toluene, ethyl ether or tetrahydrofuran.

The method (1) is preferred. The aluminoxane may permissibly contain small amounts of organometallic components.

- 5 The catalyst ingredient (A) or catalyst ingredient (A) and (B) may be used as supported on a carrier. The carrier may be, for example, an inorganic compound such as silica or alumina, or an organic polymeric compound such as polyethylene or polypropylene.

It has been found in accordance with this invention that by copolymerizing the  $C_3$ - $C_{20}$  alpha-olefin with the cyclo-olefin in specific proportions using the above catalyst system, a copolymer having properties not hitherto proposed can be obtained. This copolymerization may be carried out in a liquid phase or in a vapor phase, preferably in the liquid phase. Copolymerization in the liquid phase is usually carried out in a hydrocarbon medium. Examples of the hydrocarbon medium are aliphatic hydrocarbons such as butane, isobutane, pentane, hexane, octane, decane, dodecane, hexadecane and octadecane, alicyclic hydrocarbons such as cyclopentane, methylcyclopentane, cyclohexane and cyclooctane, aromatic hydrocarbons such as benzene, toluene and xylene, and petroleum fractions such as gasoline, kerosene and light oil. The starting olefin may also be used as the hydrocarbon medium. The aromatic hydrocarbons are especially preferred as the hydrocarbon medium.

The temperature in the polymerization reaction in the process of this invention is usually -50 to 230 °C, preferably -30 to 200 °C.

- 20 The proportion of the zirconium compound used in carrying out the process of this invention in the liquid phase is usually  $10^{-6}$  to  $10^{-2}$  gram-atom/l, preferably  $10^{-7}$  to  $10^{-3}$  gram-atom/l, as the concentration of the zirconium atom in the polymerization reaction system. The proportion of the aluminoxane is usually  $10^{-4}$  to  $10^{-1}$  gram-atom/l, preferably  $10^3$  to  $5 \times 10^{-2}$  gram-atom/l, as the concentration of the aluminum atom in the polymerization reaction system. The ratio of the aluminum atom to the transition metal atom in the polymerization system is usually from 4 to  $10^7$ , preferably from 10 to  $10^6$ . The molecular weight of the copolymer can be adjusted by using hydrogen, and/or adjusting the polymerization temperature.

The present inventors also made investigations for a novel olefinic random copolymer which has excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution, possesses excellent thermal stability even when its cyclo-olefin content is small, and which has a carbon-carbon unsaturated bond capable of reacting with maleic anhydride or the like in its side chain and can be modified easily according to various purposes. These investigations have led to the discovery that a novel olefinic random copolymer can be obtained by copolymerizing an alpha-olefin having 3 to 20 carbon atoms and a cyclic polyene and as required, a cyclo-olefin in the presence of a catalyst formed from a zirconium catalyst and an aluminoxane under specific conditions.

Thus, according to another aspect of this invention there is provided an olefinic random copolymer composed of (A) an olefin component having 3 to 20 carbon atoms and (B) a cyclic polyene component and as required, (C) a cyclo-olefin component,

- 40 (i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component (A) having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclic polyene component (B) and 0 to 90 mole% of recurring units derived from said cyclo-olefin component (C), and

- 45 (ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135°C, of from 0.01 to 10 dl/g.

The olefinic random copolymer in this embodiment is composed of (A) an alpha-olefin component having 3 to 20 carbon atoms and (B) a cyclic polyene and as required, (C) a cyclo-olefin component. The cyclo-olefin component (C) is the same cyclo-olefin component of general formula [I], [II] or [III] given hereinabove. As in the aforesaid cyclo-olefinic random copolymer, the cyclo-olefin component forms the structure represented by general formula [IV], [V] or [VI] given hereinabove.

Specific examples of the alpha-olefin used as a starting material in the production of the olefinic random copolymer of this invention may be those given hereinabove.

Specific examples of the cyclic polyene (B) used as a starting material in the production of the olefinic random copolymer of this invention are 1,3-cyclopentadiene, 1,3-cyclohexadiene, 5-ethyl-1,3-cyclohexadiene, 1,3-cycloheptadiene, 1,3-cycloheptadiene, dicyclopentadiene, dicyclohexadiene, 5-ethylidene-2-norbornene, 5-methylidene-2-norbornene, 5-vinyl-2-norbornene, 5-isopropylidene-2-norbornene, methylhydriodene, 2,3-diisopropylidene-5-norbornene, 2-ethylidene-3-isopropylidene-5-norbornene, and 2-propenyl-2,5-norbornadiene.

The olefinic random copolymer of this invention contains 5 to 99 mole%, preferably 15 to 95 mole%, especially preferably 30 to 90 mole%, of recurring units derived from the alpha-olefin component (A), 1 to 95 mole%, preferably 5 to 85 mole%, especially preferably 10 to 70 mole%, of recurring units derived from the cyclo-olefin component (B), and 0 to 90 mole%, preferably 2 to 80 mole%, especially preferably 5 to 70 mole%, of recurring units derived from the cyclo-olefin component (C). These recurring units derived from the components (A), (B) and (C) are arranged at random to form a substantially linear olefinic random copolymer. That the olefinic random copolymer of this invention is substantially linear and has no gelled crosslinked structure can be ascertained from the fact that the copolymer completely dissolves in decalin at 135 °C.

The intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of the olefinic random copolymer of this invention is 0.01 to 10 dl/g, preferably 0.05 to 7 dl/g, especially preferably 0.1 to 5 dl/g.

The molecular-weight distribution ( $\overline{M}_w / \overline{M}_n$ ) of the olefinic random copolymer of this invention, measured by gel permeation chromatography (GPC), is usually not more than 4, preferably not more than 3.5, especially preferably not more than 3.

The olefinic random copolymer of this invention can be produced by polymerizing an alpha-olefin having 3 to 20 carbon atoms and the cyclic polyene and as required, a predetermined amount of the cyclo-olefin in the presence of a catalyst formed from

(A) a zirconium compound having as a ligand at least two indenyl or substituted indenyl groups or partially hydrogenated groups thereof being bonded via an alkylene group such as an ethylene group, and

(B) an aluminoxane.

Examples of the zirconium compound and the aluminoxane may be the same as given hereinabove with regard to the production of the cyclo-olefinic random copolymer.

The catalyst ingredient (A) or catalyst ingredients (A) and (B) may be used as supported on a carrier. Examples of the carrier are inorganic compounds such as silica and alumina and organic polymeric compounds such as polyethylene and polypropylene.

It has been found in accordance with this invention that by copolymerizing the  $C_3$ - $C_{20}$  alpha-olefin and the cyclic polyene and optionally the cyclo-olefin in specific proportions using the above catalyst system, a copolymer having properties not hitherto proposed can be obtained. This copolymerization may be carried out in a liquid phase or in a vapor phase, preferably in the liquid phase. Copolymerization in the liquid phase is usually carried out in a hydrocarbon medium. Examples of the hydrocarbon medium are aliphatic hydrocarbons such as butane, isobutane, pentane, hexane, octane, decane, dodecane, hexadecane and octadecane, alicyclic hydrocarbons such as cyclopentane, methylcyclopentane, cyclohexane and cyclooctane, aromatic hydrocarbons such as benzene, toluene and xylene, and petroleum fractions such as gasoline, kerosene and light oil. The starting olefin may also be used as the hydrocarbon medium. The aromatic hydrocarbons are especially preferred as the hydrocarbon medium.

The temperature in the polymerization reaction in the process of this invention is usually -50 to 230 °C, preferably -30 to 200 °C.

The proportion of the zirconium compound used in carrying out the process of this invention in the liquid phase is usually  $10^{-6}$  to  $10^{-2}$  gram-atom/l, preferably  $10^{-7}$  to  $10^{-3}$  gram-atom/l, as the concentration of the zirconium atom in the polymerization reaction system. The proportion of the aluminoxane is usually  $10^{-4}$  to  $10^{-1}$  gram-atom/l, preferably  $10^{-3}$  to  $5 \times 10^{-2}$  gram-atom/l, as the concentration of the aluminum atom in the polymerization reaction system. The ratio of the aluminum atom to the transition metal atom in the polymerization system is usually from 4 to  $10^7$ , preferably from  $10^1$  to  $10^6$ . The molecular weight of the copolymer can be adjusted by using hydrogen, and/or adjusting the polymerization temperature.

The cyclo-olefinic random copolymer and the olefinic random copolymer provided by this invention have excellent transparency, thermal stability, heat aging resistance, chemical resistance, solvent resistance, dielectric properties and mechanical properties and a narrow molecular weight distribution and a narrow composition distribution, and possess excellent homogeneity. Because of their excellent properties, they find a wide variety of applications. For example, those having a low molecular weight can be used as synthetic waxes in candles, impregnants for match splints, paper treating agents, sizes, rubber antioxidants, water-proofing agents for corrugated boards, agents for retarding the effect of chemical fertilizers, heat storing agents, binders for ceramics, paper capacitors, electrical insulators for electrical wires and cables, neutron decelerating agents, textile treating aids, water-repellents for building materials, protective agents for paint coatings, lusterants, thixotropy-imparting agents, agents for imparting hardening to the cores of pencils and crayons, carbon ink bases, electrophotographic toners, lubricants and mold releasing agents for molding of synthetic resins, resin coloring agents, hot-melt adhesives and lubricating greases. Those having a high molecular-weight are useful in optical applications as optical lenses, optical discs, optical

fibers and windowpanes, electrical applications as water tanks for electrical irons, electric ovens, base plates for liquid crystal display, printed circuit boards, high-frequency circuit boards, and transparent conductive sheets or films, medical applications as injecting syringes, pipettes and animal gages, chemical applications or in other fields as housings of various measuring instruments, camera bodies, films, and helmets.

Those containing not more than about 20 mole% of recurring units from the cyclo-olefin component may be used in fields where their shape memorizing property is utilized, such as vibration controlling materials or tubes. Specifically, they may be used as joints of irregularly-shaped pipes, laminating materials for the inside and outside parts of pipes and rods, clamping pins for optical fiber connectors, plaster bandages, containers, automobile bumpers, various space blocking materials, and vibration control materials (soundproof materials) or medical tubes in the form of laminates with metallic surface materials.

The novel olefinic random copolymer of this invention can be easily cured or modified since it contains a carbon-carbon unsaturated bond in its side chain.

In the field of producing cyclo-olefinic copolymers, it has been strongly desired to develop a process which can produce cyclo-olefinic copolymers having a narrow molecular weight distribution efficiently with a high copolymerizing efficiency of cyclo-olefins and excellent polymerization activity. The present inventors recognized that the prior art in the field of producing cyclo-olefinic copolymers was as stated above, and worked on a process which can produce a cyclo-olefinic copolymer having a narrow molecular weight distribution with a high copolymerization efficiency of the cyclo-olefin and excellent polymerization activity. This work has now led to the discovery that the aforesaid object can be achieved by copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst composed of a compound of a transition metal of Group IVB of the periodic table having a specific coordination compound as a ligand and an aluminoxane.

Thus, according to still another aspect of this invention there is provided a process for producing a cyclo-olefinic random copolymer, which comprises copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst formed from


(A) a compound of a transition metal of Group IVB of the periodic table having as a ligand a multidentate coordination compound in which at least two conjugated cycloalkadienyl groups or substituted products thereof are bonded via a lower alkylene group, and

(B) an aluminoxane.

The catalyst used in the process of this invention is formed from (A) a compound of a transition metal of Group IVB of the periodic table and (B) an aluminoxane.

The transition metal compound (A) used as a catalyst ingredient in the process of this invention is a compound of a transition metal of Group IVB of the periodic table which has as a ligand a multidentate coordination compound in which at least two conjugated cycloalkadienyl groups or substituted groups thereof are bonded via a lower alkylene group. The compound of the transition metal of Group IVB of the periodic table are selected from titanium, zirconium and hafnium compounds. Titanium and zirconium are preferred as the transition metal in the catalyst ingredient (A), zirconium being especially preferred.

For example, the Group IVB transition metal compound (A) is represented by the following general formula [IX]



[IX]

wherein  $R^0$  represents a lower alkylene group, and  $R^1$  and  $R^2$  represent a conjugated cycloalkadienyl group or a substituted group thereof,  $R^3$  and  $R^4$  represent a cycloalkadienyl group, an aryl group, an alkyl group, an aralkyl group, a cycloalkyl group, a halogen atom, a hydrogen atom,  $OR^a$ ,  $SR^b$ ,  $NR_2^c$ , or  $P_2^d$ ,  $R^a$ ,  $R^b$ ,  $R^c$  and  $R^d$  represents a hydrocarbon group such as an alkyl, cycloalkyl, aryl or aralkyl group, or a silyl group, and the  $R^c$  groups and  $R^d$  groups may be linked to form a ring.

The lower alkylene group may be, for example, a methylene, ethylene, propylene or butylene group. Examples of the conjugated cycloalkadienyl group include a cyclopentadienyl group, a methylcyclopentadienyl group, an ethylcyclopentadienyl group, a dimethylcyclopentadienyl group, an indenyl group, a tetrahydroindenyl group, and a fluorenyl group. Examples of the alkyl group are methyl, ethyl, propyl, isopropyl, butyl, hexyl, octyl, 2-ethylhexyl, decyl and oleyl groups. The aryl group may be, for example, a phenyl or tolyl group. The aralkyl groups may be, for example, a benzyl or neophyl group. Examples of the cycloalkyl group include cyclopentyl, cyclohexyl, cyclooctyl, norbornyl and bicyclononyl groups and alkyl-

substituted groups thereof. The hydrocarbon group may also include unsaturated aliphatic groups such as vinyl, allyl, propenyl, isopropenyl and 1-butenyl groups, and unsaturated alicyclic groups such as a cyclohexenyl group. The halogen atom may be for example fluorine, chlorine or bromine.

The zirconium compounds include, for example, the indenyl-type zirconium compounds exemplified  
5 hereinabove, and the following compounds.

Ethylenebis(cyclopentadienyl)zirconium monochloride monohydride,  
ethylenebis(cyclopentadienyl)zirconium dichloride,  
ethylenebis(cyclopentadienyl)methylzirconium monochloride,  
ethylenebis(cyclopentadienyl)dimethylzirconium,  
10 ethylenebis(cyclopentadienyl)diphenylzirconium,  
methylenebis(cyclopentadienyl)zirconium dichloride,  
methylenebis(cyclopentadienyl)dimethylzirconium,  
propylenebis(cyclopentadienyl)zirconium dichloride,  
ethylenebis(fluorenyl)zirconium dichloride,  
15 ethylenebis(fluorenyl)dimethylzirconium,  
ethylenebis(fluorenyl)diphenylzirconium,  
methylenebis(fluorenyl)zirconium dichloride,  
methylenebis(fluorenyl)dimethylzirconium, and  
propylenebis(fluorenyl)zirconium dichloride.

20 Examples of the titanium compounds include  
ethylenebis(indenyl)titanium dichloride,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-titanium dichloride,  
ethylenebis(cyclopentadienyl)titanium dichloride,  
methylenebis(cyclopentadienyl)titanium dichloride,  
25 propylenebis(cyclopentadienyl)titanium dichloride,  
methylenebis(indenyl)titanium dichloride,  
methylenebis(4,5,6,7-tetrahydro-1-indenyl)-titanium dichloride,  
propylenebis(indenyl)titanium dichloride,  
ethylenebis(fluorenyl)titanium dichloride, and  
30 propylenebis(fluorenyl)titanium dichloride.

Examples of the hafnium compounds include the following compounds.

Ethylenebis(cyclopentadienyl)hafnium dichloride,  
methylenebis(cyclopentadienyl)hafnium dichloride,  
propylenebis(cyclopentadienyl)hafnium dichloride,  
35 methylenebis(indenyl)hafnium dichloride,  
methylenebis(4,5,6,7-tetrahydro-1-indenyl)-hafnium dichloride,  
propylenebis(indenyl)hafnium dichloride,  
ethylenebis(indenyl)hafnium dichloride, and  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)hafnium dichloride.

40 The aluminosilane used as the catalyst ingredient (B) may be, for example, the organoaluminum compounds of general formulae [VII] and [VIII] which are exemplified hereinabove.

The catalyst ingredient (A) or the catalyst ingredients (A) and (B) may be used as supported on a carrier. The carrier may be, for example, an inorganic compound such as silica or alumina, or an organic polymeric compound such as polyethylene or polypropylene.

45 Specific examples of  $C_2-C_{20}$  alpha-olefins which are used in the polymerization reaction in accordance with the process of this invention include, ethylene, propylene, 1-butene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-octadecene and 1-eicosene.

Specific examples of the cyclo-olefin to be supplied to the polymerization reaction in accordance with the process of this invention include cyclic monoenes, for example monocycloalkenes such as  
50 cyclopropene, cyclobutene, cyclopentene, cyclohexene, 3-methylcyclohexene, cycloheptene, cyclooctene, cyclodecene, cyclododecene, tetracyclodecene, octacyclodecene and cycloeicosene, bicycloalkenes such as norbornene, 5-methyl-2-norbornene, 5-ethyl-2-norbornene, 5-isobutyl-2-norbornene, 5,6-dimethyl-2-norbornene, and 5,5,6-trimethyl-2-norbornene, tricycloalkenes such as 2,3,3a,7a-tetrahydro-4,7-methano-1H-indene and 3a,5,6,7a-tetrahydro-4,7-methano-1H-indene, tetracycloalkenes such as 1,4,5,8-dimethano-  
55 1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-ethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-propyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-hexyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-stearyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2,3-dimethyl-1,4,5,8-dimethano-

1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-methyl-3-ethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-chloro-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, • 2-bromo-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2-fluoro-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene; polycycloalkenes such as  
 5 hexacyclo[6,6,1,1<sup>3,4</sup>,1<sup>10,13</sup>,0<sup>2,7</sup>,0<sup>9,14</sup>]heptadecene-4, pentacyclo[8,8,1<sup>2,3</sup>,1<sup>4,7</sup>,1<sup>11,14</sup>,0,0<sup>3,4</sup>,0<sup>12,17</sup>]heneicosene-5, octacyclo[8,8,1<sup>2,3</sup>,1<sup>4,7</sup>,1<sup>11,14</sup>,1<sup>13,16</sup>,0,0<sup>3,4</sup>,0<sup>12,17</sup>]decocene-5; and cyclic polyenes such as dicyclopentadiene, 5-methylene-2-norbornene, 5-ethylidene-2-norbornene, 1,5-cyclooctadiene, 5,8-endomethylenehexahydronaphthalene and alkylidenetetrahydroindenes.

In the process of this invention, a mixture of the alpha-olefin and the cyclo-olefin is fed into the  
 10 polymerization reaction system as a starting material. The content of the alpha-olefin in the mixture is usually 1 to 90 mole%, preferably 2 to 80 mole%, and the content of the cyclo-olefin is usually 10 to 99 mole%, preferably 20 to 98 mole%.

In the process of this invention, the polymerization is usually carried out in a hydrocarbon medium. Examples of the hydrocarbon medium are aliphatic hydrocarbons such as butane, isobutane, pentane,  
 15 hexane, octane, decane, dodecane, hexadecane and octadecane, alicyclic hydrocarbons such as cyclopentane, methylcyclopentane, cyclohexane and cyclooctane, aromatic hydrocarbons such as benzene, toluene and xylene, and petroleum fractions such as gasoline, kerosene and light oil. The starting olefin may also be used as the hydrocarbon medium. The aromatic hydrocarbons are especially preferred as the hydrocarbon medium.

20 In the process of this invention, a liquid phase polymerization method such as suspension polymerization and solution polymerization and a vapor-phase polymerization method are usually employed. The temperature in the polymerization reaction is usually -50 to 230 °C, preferably -30 to 200 °C.

The proportion of the transition metal compound used in carrying out the process of this invention in the liquid phase is usually  $10^{-8}$  to  $10^{-2}$  gram-atom/l, preferably  $10^{-7}$  to  $10^{-3}$  gram-atom/l, as the concentration of the transition metal atom in the polymerization reaction system. The proportion of the aluminosilane is  
 25 usually  $10^{-4}$  to  $10^{-1}$  gram-atom/l, preferably  $10^3$  to  $5 \times 10^{-2}$  gram-atom/l, as the concentration of the aluminum atom in the polymerization reaction system. The ratio of the aluminum atom to the transition metal atom in the polymerization system is usually from 4 to  $10^7$ , preferably from 10 to  $10^6$ . The molecular weight of the copolymer can be adjusted by using hydrogen, and/or adjusting the polymerization temperature.

30 In the process of this invention, a cyclo-olefinic copolymer is obtained by working up the polymerization reaction mixture after the polymerization reaction by conventional methods. The resulting cyclo-olefinic copolymer is usually composed of 20 to 99.9 mole%, preferably 30 to 99.5 mole%, of the alpha-olefin component and 0.1 to 90 mole%, preferably 0.5 to 70 mole%, of the cyclo-olefin component. The intrinsic  
 35 viscosity  $[\eta]$ , measured in decalin at 135 °C, of the cyclo-olefinic copolymer is usually 0.005 to 20 dl/g, preferably 0.01 to 10 dl/g. Its molecular weight distribution measured by gel permeation chromatography is usually not more than 3, preferably not more than 2.5.

The process of this invention can produce a cyclo-olefinic random copolymer having a narrow molecular weight distribution with excellent polymerization activity.

40 The following examples specifically illustrate the cyclo-olefinic random copolymer and the olefinic random copolymer of this invention.

The properties of the copolymers obtained in the following examples were measured by the following methods.

#### 45 Copolymer composition (mole%)

The content of units derived from the cyclo-olefin component in the copolymer was measured by <sup>13</sup>C-NMR (200 megahertz).

#### Intrinsic viscosity $[\eta]$

Measured by an Ubbelohde viscometer at 135 °C.

Molecular weight distribution ( $\overline{M}_w / \overline{M}_n$ )

Measured by the GPC method.

5

Glass transition temperature (TG)

Measured by a dynamic mechanical analyzer (DMA) (made by E. I. du Pont de Nemours & Co.).

10

EXAMPLE 1Preparation of ethylenebis(indenyl)zirconium dichloride

15 Tetrahydrofuran (60 ml) was fed into a 200 ml fully nitrogen-purged glass flask, and then cooled to -78 °C. Zirconium tetrachloride (4.9 g) was introduced into the flask. The mixture was gradually heated to 60 °C and stirred for 1 hour at this temperature to form a solution. Subsequently, a solution of 21 millimoles of bis-(indenyl)ethane lithium salt in 50 ml of tetrahydrofuran was added, and the mixture was stirred at 60 °C for 1 hour. The mixture was further stirred for 12 hours at 25 °C. Under reduced pressure, tetrahydrofuran was  
20 removed to form a solid. The solid was washed with methanol, and dried under reduced pressure to give 2.1g of ethylenebis(indenyl)zirconium dichloride.

Preparation of an aluminoxane

25

$Al_2(SO_4)_3 \cdot 14H_2O$  (37 g) and 125 ml of toluene were introduced into a 400 ml fully nitrogen-purged flask, and cooled to 0 °C. Trimethyl aluminum (500 millimoles) diluted with 125 ml of toluene was added dropwise. The mixture was heated to 40 °C, and treated at this temperature for 10 hours. After the reaction, the reaction mixture was filtered. By removing toluene from the filtrate, 13 g of aluminoxane as a white solid  
30 was obtained. The aluminoxane had a molecular weight of 930 when it was determined by freezing point depression in benzene. The  $\overline{m}$  value of the aluminoxane in the catalyst ingredient (B) was 14. For polymerization, the aluminoxane was used as a solution in toluene.

Polymerization

35 A 1000 ml fully nitrogen-purged glass autoclave was charged with 500 ml of purified toluene and 15 g of tetracyclododecene, and propylene gas was passed through it at a rate of 60 liters/hr. The flask was maintained at 20 °C for 10 minutes. Subsequently, 5 mg-atom as the aluminum atom of the aluminoxane and  
40  $0.5 \times 10^{-2}$  mg-atom, as the zirconium atom, of ethylenebis(indenyl)zirconium dichloride in toluene were introduced into the autoclave, and the polymerization was started. The polymerization was carried out at 20 °C for 2 hours under atmospheric pressure, and then stopped by adding isopropanol. The polymerization proceeded in a homogeneous solution, and after the 2-hour polymerization, absorption of propylene was observed. The polymer solution was added to a large amount of a mixture of methanol and acetone to  
45 precipitate the polymer. The polymer was dried overnight under reduced pressure at 120 °C. After drying, the amount of the copolymer yielded was 8.1 g. The activity per unit amount of zirconium was 60 g of polymer/mg Zr atom-hr. The resulting copolymer contained 75 mole% of propylene, and had an intrinsic viscosity  $[\eta]$  of 0.09 dl/g, a molecular weight distribution of 1.48, and a glass transition temperature of 78 °C.

50

55

## EXAMPLES 2-9

Example 1 was repeated except that the copolymerization conditions indicated in Table 3 were employed. The properties of the resulting polymers are also shown in Table 3.

Table 3

Example	Copolymerization conditions						Properties of the polymer				
	Cyclo-olefin(*3)		$\alpha$ -olefin(*4)		Polymeri- zation tempera- ture (°C)	Polymeri- zation time (hr)	Amount Yielded (g)	$\alpha$ -olefin content (mole%)	$[\eta]$ (dl/g)	$\bar{M}_w/\bar{M}_n$	$T_g$ (°C)
	Name	Concentra- tion in the reactor (g/l)	Name	Concentra- tion in the reactor (g/l)							
1	TD	30	Propylene	60	20	2	6.1	75	0.09	1.48	78
2 (*1)	"	"	"	"	"	4	1.4	70	0.07	1.44	95
3 (*2)	"	"	"	"	"	2	2.2	65	0.07	1.44	123
4	"	"	"	"	0	"	1.1	72	0.20	1.46	89
5	"	"	"	"	50	"	34.4	77	0.11	1.52	67
6	MTD	"	"	"	20	"	5.4	76	0.11	1.45	81
7	NB	"	"	"	"	4	3.6	56	0.15	1.40	110
8	MNB	"	"	"	"	"	3.2	51	0.19	1.44	113
9	"	"	4MP-1	0.5 (l/l)	"	3	0.6	97	0.13	1.30	84

Note: The concentration of Et(Ind)<sub>2</sub>ZrCl<sub>2</sub> was adjusted to 0.1 mM/l and the concentration of methylaluminoxane, to 10.0 mM/l.

(\*1): The amount of N<sub>2</sub> fed was adjusted to 180 liters/hr.

(\*2): The amount of N<sub>2</sub> fed was adjusted to 60 liters/hr.

(\*3): TD = tetracyclododecene, MTD = 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8a-octahydronaphthalene, NB = norbornene, MNB = 5-methyl-2-norbornene

(\*4): 4MP-1 = 4-methyl-1-pentene



## EXAMPLE 10

Polymerization

5 A 1000 ml fully nitrogen-purged glass autoclave was charged with 500 ml of purified toluene and 15 g of 5-ethylidene-2-norbornene, and propylene gas was passed through it at a rate of 60 liters/hr. The flask was maintained at 20 °C for 10 minutes. Subsequently, 5 mg-atom as the aluminum atom of the  
10 aluminoxane and  $0.5 \times 10^{-2}$  mg-atom, as the zirconium atom, of ethylenebis(indenyl)zirconium dichloride dissolved in toluene were introduced into the autoclave, and the polymerization was started. The polymerization was carried out at 20 °C for 4 hours under atmospheric pressure, and then stopped by adding  
isopropanol. The polymerization proceeded in a homogeneous solution, and after the 4-hour polymerization, absorption of propylene was observed. The polymer solution was added to a large amount of a mixture of  
15 methanol and acetone to precipitate the polymer. The polymer was dried overnight under reduced pressure at 120 °C. After drying, the amount of the copolymer yielded was 2.2 g. The resulting copolymer contained  
66 mole% of propylene, and had an intrinsic viscosity  $[\eta]$  0.16 dl/g, and a molecular weight distribution of 1.41.

## EXAMPLES 11-17

20 Example 10 was repeated except that the copolymerization conditions indicated in Table 4 were employed. The properties of the resulting polymers are also shown in Table 4.

Table 4

Example	Copolymerization conditions							Properties of the polymer				
	Propylene Concentra- tion in the reactor (g/hr)	Cyclic polyene(*1)		Cyclo-olefin (*2)		Polymeri- zation tempera- ture (°C)	Polymeri- zation time (hr)	Amount yielded (g)	Cyclic polyene content (mole%)	cyclo- olefin content (mole%)	[ $\eta$ ] (dl/g)	$\bar{M}_w/\bar{M}_n$
		Name	Concentra- tion in the reactor (g/l)	Name	Concentra- tion in the reactor (g/l)							
10	60	ENB	30	TD	0	20	4	2.2	34	0	0.16	1.41
11	"	"	"	"	10	"	"	2.0	31	8	0.11	1.48
12	"	"	"	"	30	"	"	1.7	25	17	0.09	1.49
13	"	"	"	NB	10	"	"	2.1	29	11	0.14	1.45
14	"	VNB	"	TD	0	"	"	1.9	31	0	0.15	1.40
15	"	"	"	"	10	"	"	1.7	28	7	0.12	1.46
16	"	"	"	"	30	"	"	1.4	21	16	0.10	1.47
17	"	"	"	NB	10	"	"	1.8	28	13	0.13	1.43

Note: The concentration of Et(Ind)<sub>2</sub>ZrCl<sub>2</sub> was adjusted to 0.1 mm/l and the concentration of methylaluminoxane, to 10.0 mm/l.

(\*1): ENB = ethylidene-2-norbornene, VNB = 5-vinyl-2-norbornene

(\*2): TD = tetracyclododecene, NB = norbornene

## EXAMPLE 18

## Polymerization

A 1000 ml fully nitrogen-purged glass autoclave was charged with 250 ml of purified toluene and 7.5 g of tetracyclododecene, and ethylene gas was passed through it at a rate of 60 liters/hr. The flask was maintained at 20 °C for 10 minutes. Subsequently, 2.5 mg-atom as the aluminum atom of the aluminoxane and  $2.5 \times 10^{-2}$  mg-atom, as the zirconium atom, of ethylenebis(indenyl)zirconium dichloride in toluene were introduced into the autoclave, and the polymerization was started. The polymerization was carried out at 20 °C for 30 minutes under atmospheric pressure, and then stopped by adding isopropanol. The polymerization proceeded in a homogeneous solution, and after the 30-minute polymerization, absorption of ethylene was observed. The polymer solution was added to a large amount of a mixture of methanol and acetone to precipitate the polymer. The polymer was dried overnight under reduced pressure at 120 °C. After drying, the amount of the copolymer yielded was 16.6 g. The activity per unit amount of zirconium was 1,300 g of polymer/mg Zr atom-hr. The resulting copolymer contained 90 mole% of ethylene, and had an intrinsic viscosity  $[\eta]$  of 2.35 dl/g and a molecular weight distribution of 2.03.

## EXAMPLE 19

Example 18 was repeated except that 7.5 g of 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene was used instead of the tetracyclododecene. There was obtained 15.1 g of a copolymer having an ethylene content of 92 mole%, a molecular weight distribution of 2.20 and an intrinsic viscosity of 2.43 dl/g. The activity per unit amount of zirconium was 1,200 g of polymer/mg Zr atom-hr.

## EXAMPLE 20

Example 18 was repeated except that 7.5 g of 2,3-dimethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene was used instead of the tetracyclododecene. There was obtained 13.7 g of a copolymer having an ethylene content of 93 mole%, a molecular weight distribution of 2.15 and an intrinsic viscosity  $[\eta]$  of 2.46 dl/g. The activity per unit amount of zirconium was 1,100 g of polymer/mg Zr atom-hr.

## EXAMPLE 21

Example 18 was repeated except that 3.5 g of 5-methyl-2-norbornene was used instead of the tetracyclododecene. There was obtained 9.4 g of a copolymer having an ethylene content of 82.3 mole%, a molecular weight distribution of 2.07 and an intrinsic viscosity  $[\eta]$  of 2.86 dl/g. The activity per unit amount of zirconium was 750 g of polymer/mg Zr atom-hr.

## EXAMPLE 22

Example 18 was repeated except that 7.5 g of 5-methyl-2-norbornene was used instead of the tetracyclododecene. There was obtained 15.6 g of a copolymer having an ethylene content of 74.8 mole%, a molecular weight distribution of 2.11 and an intrinsic viscosity  $[\eta]$  of 2.18 dl/g. The activity per unit amount of zirconium was 830 g of polymer/mg Zr atom-hr.

## EXAMPLE 23

Example 18 was repeated except that 7.5 g of norbornene was used instead of the tetracyclododecene. There was obtained 8.1 g of a copolymer having an ethylene content of 74 mole%, a molecular weight distribution of 2.32 and an intrinsic viscosity  $[\eta]$  of 2.15 dl/g. The activity per unit amount of zirconium was 650 g of polymer/mg Zr atom-hr.

## EXAMPLE 24

Example 18 was repeated except that 7.5 g of 5-ethylidene-2-norbornene was used instead of the tetracyclododecene. There was obtained 7.1 g of a copolymer having an ethylene content of 78.5 mole %, a molecular weight distribution of 2.14 and an intrinsic viscosity  $[\eta]$  of 2.21 dl/g. The activity per unit amount of zirconium was 570 g of polymer/mg-Zr atom-hr.

## EXAMPLE 25

A 1000 ml fully nitrogen-purged glass autoclave was charged with 500 ml of purified toluene and 15 g of tetracyclododecene, and propylene gas was passed through it at a rate of 60 liters/hr. The flask was maintained at 20 °C for 10 minutes. Subsequently, 5 mg-atom as the aluminum atom of the aluminosilane and  $0.5 \times 10^{-2}$  mg-atom, as the zirconium atom, of ethylenebis(indenyl)zirconium dichloride in toluene were introduced into the autoclave, and the polymerization was started. The polymerization was carried out at 20 °C for 2 hours under atmospheric pressure, and then stopped by adding isopropanol. The polymerization proceeded in a homogeneous solution, and after the 2-hour polymerization, absorption of propylene was observed. The polymer solution was added to a large amount of a mixture of methanol and acetone to precipitate the polymer. The polymer was dried overnight under reduced pressure at 120 °C. After drying, the amount of the copolymer yielded was 6.1 g. The activity per unit amount of zirconium was 60 g of polymer/mg Zr atom-hr. The resulting copolymer contained 75 mole% of propylene, and had an intrinsic viscosity  $[\eta]$  of 0.09 dl/g and a molecular weight distribution of 1.48.

## EXAMPLE 26

Example 25 was repeated except that the amount of purified toluene was changed to 250 ml, 15 g of 5-methyl-1-pentene was used instead of the tetracyclododecene and 250 ml of 4-methyl-1-pentene was used instead of propylene, and the polymerization was carried out at 20 °C for 3 hours. There was obtained 0.8 g of a copolymer having a 4-methyl-1-pentene content of 97 mole%, an intrinsic viscosity  $[\eta]$  of 0.13 dl/g and a molecular weight distribution of 1.30.

## Claims

1. A cyclo-olefinic random copolymer derived from an alpha-olefin component having 3 to 20 carbon atoms and a cyclo-olefin component,
  - (i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component and 95 to 1 mole% of recurring units derived from said cyclo-olefin component, and
  - (ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin 135° C, of from 0.01 to 10 dl/g.
2. A copolymer according to claim 1 which contains 15 to 95 mole% of units derived from said alpha-olefin component and 85 to 15 mole% of units derived from said cyclo-olefin component.
3. A copolymer according to claim 1 which contains 30 to 90 mole% of units derived from said alpha-olefin component and 70 to 10 mole% of units derived from said cyclo-olefin component.
4. A copolymer according to claim 1, 2 or 3 which has an intrinsic viscosity  $[\eta]$ , measured in decalin at 135° C, of 0.05 to 7 dl/g.
5. A copolymer according to claim 4 which has an intrinsic viscosity  $[\eta]$ , measured in decalin at 135° C, of 0.5 to 5 dl/g.

6. A copolymer according to any one of claims 1 to 5 wherein the alpha-olefin component is propylene or 4-methyl-1-pentene, and the cyclo-olefin component is tetracyclododecene, 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a, 5,8,8a-octahydronaphthalene, norbornene or 5-methyl-2-norbornene.

7. An olefinic random copolymer derived from (A) an olefin component having 3 to 20 carbon atoms, (B) a cyclic polyene component, and optionally (c) a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component (A) and 95 to 1 mole% of recurring units derived from said cyclic polyene component (B) and 0 to 90 mole% of recurring units derived from said cyclo-olefin component (C), and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135° C, of from 0.01 to 10 dl/g.

8. A copolymer according to claim 7 which contains 15 to 95 mole% of units derived from the alpha-olefin component, 85 to 5 mole% of units derived from the cyclic polyene component, and 2 to 80 mole% of the cyclo-olefin component.

9. A copolymer according to claim 7 which contains 30 to 80 mole% of units derived from the alpha-olefin component (A), 70 to 10 mole% of units derived from the cyclic polyene component, and 5 to 70 mole% of the cyclo-olefin component.

10. A copolymer according to claim 7, 8 or 9 which has an intrinsic viscosity  $[\eta]$ , measured in decalin at 135° C, of 0.05 to 7 dl/g.

11. A copolymer according to claim 10 which has an intrinsic viscosity  $[\eta]$ , measured in decalin at 135° C, of 0.5 to 5 dl/g.

12. A copolymer according to any one of claims 7 to 11 wherein the alpha-olefin component (A) is propylene, the cyclic polyene component (B) is 5-ethylidene-2-norbornene or 5-vinyl-2-norbornene, and the cyclo-olefin component (C) is tetracyclododecene or norbornene.

13. A process for producing a cyclo-olefinic random copolymer, which comprises copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst formed from


(A) a compound of a transition metal of Group IVB of the periodic table having as a ligand a multi-dentate coordination compound in which at least two conjugated cycloalkadienyl groups or substituted products thereof are bonded via a lower alkylene group, and

(B) an aluminoxane.

14. A process according to claim 13 wherein the transition metal compound is a zirconium compound containing as a ligand at least two indenyl groups or substituted indenyl groups or partially hydrogenated groups thereof which are bonded via an alkylene group.

15. A process according to claim 14 wherein the transition metal compound is ethylenebis(indenyl)-zirconium dichloride.

16. A process according to claim 13, 14 or 15 wherein the aluminoxane is represented by the general formula



wherein R represents a hydrocarbon group, and m represents an integer of at least 2.

17. A process according to claim 16 wherein R is a methyl, ethyl or isobutyl group, and m is an integer of at least 5.

18. A process according to claim 16 wherein R is a methyl group and m is an integer of 5 to 50.

19. A process according to any one of claims 13 to 18 wherein the alpha-olefin is selected from ethylene, propylene and 4-methyl-1-pentene, and the cyclo-olefin is selected from tetracyclododecene, 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene, 2,3-dimethyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8, 8a-octahydronaphthalene, 5-methyl-2-norbornene, norbornene and 5-ethylidene-2-norbornene.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 283 164  
A3**

(12)

# EUROPEAN PATENT APPLICATION

(21) Application number: 88301791.5

(61) Int. Cl.<sup>4</sup>: **C08F 210/00 , C08F 232/00 ,  
/(C08F210/00,232:00),  
(C08F232/00,210:00)**

(22) Date of filing: 01.03.88

(30) Priority: **02.03.87 JP 45152/87  
11.12.87 JP 312112/87  
15.12.87 JP 315206/87  
01.02.88 JP 19622/88**

(43) Date of publication of application:  
**21.09.88 Bulletin 88/38**

(64) Designated Contracting States:  
**DE FR GB IT NL**

(58) Date of deferred publication of the search report:  
**20.12.89 Bulletin 89/51**

(71) Applicant: **mitsui petrochemical  
industries, ltd.  
2-5, Kasumigaseki 3-chome Chiyoda-ku  
Tokyo 100(JP)**

(72) Inventor: **Ishimaru, Naoshi  
4-9, Waki 2-chome Waki-cho  
Kuga-gun Yamaguchi-ken(JP)  
Inventor: Tsutsui, Toshiyuki  
3-6, Misono 1-chome  
Ohtake-shi Hiroshima-ken(JP)  
Inventor: Toyota, Akinori  
103-21, Minami-Iwakuni-cho 2-chome  
Iwakuni-shi Yamaguchi-ken(JP)  
Inventor: Kashiwa, Norio  
18-22, Yamate-cho 1-chome  
Iwakuni-shi Yamaguchi-ken(JP)**

(74) Representative: **Myerscough, Phillip Boyd et al  
J.A.Kemp & Co. 14, South Square Gray's Inn  
London, WC1R 5EU(GB)**

(54) **Cyclo-olefinic random copolymer, olefinic random copolymer, and process for producing cyclo-olefinic random copolymers.**

(57) A cyclo-olefinic random copolymer composed of an alpha-olefin component having 3 to 20 carbon atoms and a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component having 3 to 20 carbon atoms and 1 to 95 mole% of recurring units derived from said cyclo-olefin component, and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g; and

an olefinic random copolymer composed of (A) an olefin component having 3 to 20 carbon atoms and (B) a cyclic polyene component and as required, (C) a cyclo-olefin component,

(i) said copolymer containing 5 to 99 mole% of recurring units derived from said alpha-olefin component (A) having 3 to 20 carbon atoms and 1 to 95

mole% of recurring units derived from said cyclic polyene component (B) and 0 to 90 mole% of recurring units derived from said cyclo-olefin component (C), and

(ii) said copolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of from 0.01 to 10 dl/g; and a process for production thereof. Also provided is a process for producing a cyclo-olefinic random copolymer, which comprises copolymerizing an alpha-olefin and a cyclo-olefin in the presence of a catalyst formed from

(A) a compound of a transition metal of Group IVB of the periodic table having as a ligand a multi-dentate coordination compound in which at least two conjugated cycloalkadienyl groups or substituted products thereof are bonded via a lower alkylene group, and

EP 0 283 164 A3

(B) an aluminoxane.



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 88 30 1791

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
Y	EP-A-0 203 799 (MITSUI PETROCHEMICAL) * Claims 1-11; column 17, line 37 - column 18, line 7 * ---	1-12	C 08 F 210/00 C 08 F 232/00 // (C 08 F 210/00 C 08 F 232:00 ) (C 08 F 232/00 C 08 F 210:00 )
Y	EP-A-0 156 464 (MITSUI PETROCHEMICAL) * Claims 1-8; page 16, line 15 - page 17, line 9 * ---	1-12	
Y	US-A-3 725 366 (Y. AMIARD) * Claims 1-6; column 2, line 59 - column 3, line 8 * ---	1-12	
A	EP-A-0 185 918 (HOECHST) * Claims 1-3 * ---	13-18	
A	EP-A-0 129 368 (EXXON) * Claims 1-6 * ---	13-18	
A	DE-A-1 570 910 (MITSUBISHI PETROCHEMICAL) * Claims 1-6 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			C 08 F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22-09-1989	Examiner PERMENTIER W.A.
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document			